





3 ALMiG Compressor Systems



QUALITY AND INNOVATIONS MADE IN GERMANY.

Decades of experience and excellent performance

ALMiG is one of the leading compressed air technology system providers and has decades of experience delivering premium products in the compressed air sector. Companies all around the world trust in our customer focused solutions, our quality, innovation and flexibility. Our advanced compressor technologies combine excellence with the quietest possible running performance, optimal energy efficiency and particularly careful conservation of resources.

Ongoing development and comprehensive industry knowledge

Constant research and development form the essential foundation for the efficiency of every system manufactured by ALMiG. Only these constant enhancements and improvements enable us to react quickly and flexibly to individual customer wishes. This attitude is complemented by a comprehensive understanding of the sector: we understand the challenges that our customers are faced with and the requirements that arise as a consequence. ALMiG offers effective solutions for a wide range of applications – from small craft workshops to medium-sized companies to big industry.

Complete service and maximum availability

The highest quality technological solutions deserve an equally high level of service. The ALMiG service provisions offer our customers a complete service programme: from providing comprehensive advice to ensuring availability, improving cost-effectiveness and developing energy-saving potential. As an expert partner, ALMiG offers its customers advice and support on all issues. Our goal is to contribute to your economic success with our service offerings.

ALMiG: Compressor Systems Made in Germany

Piston compressors Screw compressors Turbo compressors Scroll compressors Special installations Controllers Compressed air treatment Services



BELT XP

Robust and reliable

Stable air pressure, consistent volume flow and quiet continuous operation are just a few of the advantages that benefit you with the ALMiG BELT XP series. These sophisticated, compact units, unlike conventional reciprocating compressors, offer reduced noise levels and improved compressed air quality through a much lower residual oil content.

With its robust and proven components, the BELT XP compact system reliably ensures high compressor performance and operational reliability around the clock. The long-lasting compressors are equipped with a low-maintenance V-belt drive, which transmits drive power from 4 to 37 kW virtually loss-free.

The BELT XP series enables particularly economical and reliable operation in the volume flow range up to 6.30 m³/min.

In addition, the concept of the fixed-speed series aims at long service life and low maintenance costs, making the screw compressors particularly suitable for use as base-load compressors in continuous operation.

The intuitive ALMiG controls make the BELT series easy to operate. Due to the maintenance-friendly design, the service costs remain completely manageable.

Application

Industry

Power output 4 - 37 kW

Volume flow acc. to ISO 1217 (Annex C-2009):

0.48-6,30 m³/min

Operating pressure 5 - 13 bar

Cooling Air-cooled

Drive V-belt

Motor

Energy efficiency class IE 3; IP 55 protection, protection class F



- + Versatile use thanks to numerous possible extension options
- + Proven V-belt drive
- + Low maintenance costs due to long service intervals



Integral compressor stage

Combines compressor stage and

Product information


ALMiG XP Series:

The standard compressors for demanding applications:

- Xtra Performance
- Efficient cooling

0

Robust and long-lasting components

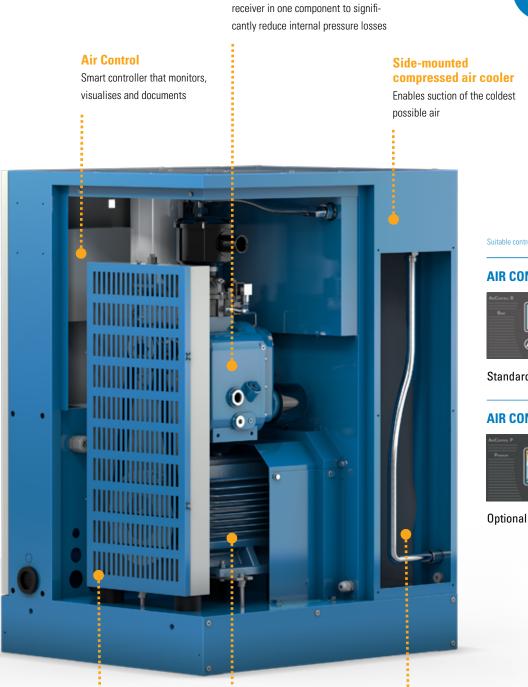

Service-friendly construction

High-efficient IE3-Motor

> Efficient, noise-reducing cooling air flow

Suitable controllers:

AIR CONTROL B



Standard

AIR CONTROL P



BELT XP





BELT XP 4-6

BELT XP 8-15

| 50 Hz | | | | | | | | |
|---------|--|--------|--------|----------------------|--------|-------|--------|--------|
| BELT XP | Volume flow acc. to ISO 1217 (Annex C-2009) | | | Rated motor power | Length | Width | Height | Weight |
| | 8 bar | 10 bar | 13 bar | | | | | |
| Model | m³/min | m³/min | m³/min | kW | mm | mm | mm | kg |
| 4 | 0,56 | 0,48 | - | 4 | 750 | 600 | 955 | 201 |
| 6 | 0,78 | 0,68 | 0,58 | 5,5 | 750 | 600 | 955 | 217 |
| 8 | 1,18 | 1,00 | 0,76 | 7,5 | 800 | 670 | 1100 | 275 |
| 11 | 1,70 | 1,49 | 1,30 | 11 | 800 | 670 | 1100 | 285 |
| 15 | 2,21 | 1,95 | 1,68 | 15 | 800 | 670 | 1100 | 370 |

7 Technical data





BELT XP 16-22

BELT XP 30-37

| 50 Hz | | | | | | | | |
|---------|--|--------|--------|----------------------|--------|-------|--------|--------|
| BELT XP | Volume flow acc. to ISO 1217 (Annex C-2009) | | | Rated motor power | Length | Width | Height | Weight |
| | 8 bar | 10 bar | 13 bar | | | | | |
| Model | m³/min | m³/min | m³/min | kW | mm | mm | mm | kg |
| 16 | 2,40 | 2,13 | 1,66 | 15 | 1250 | 880 | 1515 | 610 |
| 18 | 3,00 | 2,77 | 2,20 | 18,5 | 1250 | 880 | 1515 | 653 |
| 22 | 3,70 | 3,34 | 2,62 | 22 | 1250 | 880 | 1515 | 681 |
| 30 | 5,20 | 4,62 | 3,86 | 30 | 1350 | 940 | 1680 | 857 |
| 37 | 6,30 | 5,84 | 4,70 | 37 | 1350 | 940 | 1680 | 895 |
| | | | | | | | | |

